

# Data sheet

## LED dimmer S-CORD-150



Item-No.: S-CORD-150-BLACK, black  
Item-No.: S-CORD-150-WHITE, white  
Item-No.: S-CORD-150-TRANSPARENT, transparent


- With protective conductor terminal
- With push function to use for hand- and foot control
- Electronic transistor controlled dimmer without inductor
- Operates utterly quiet
- Flicker free dim in the min- and maximum brightness range due tuning possibilities
- With Soft-start and memory-function
- Integrated orientation light
- Suitable for connection with a textile cable




### Technical data

Suitable for:	Dimmable LED lamps, 230V- incandescent- and halogen lamps
Operating principle:	Leading edge
Rated voltage:	230 V~ (+/- 10%), 50 Hz
Connected load:	5 - 150 W/VA LED 3 - 55 W
Function:	On/off/dim by pushing the upper case
Temperature protection:	Thermal protection
Overload/short-circuit protection:	Electronic
Max. cord diameter:	7,5 mm
Cut-off:	Electronic cut-off $\epsilon$
Cycle of operation:	> 25.000
Stand-by:	< 0,85 W
Connection:	Screw terminal 0,5 - 1,5 mm <sup>2</sup> (flexible)
Mode of operation:	S1
Protection class:	2
Safety class:	IP20
Contamination level:	1
Brightness tuning:	If (e.g.) LED lamps flicker in the min- or maximum brightness range, there is a possibility to raise the min/max brightness on the backside of the case (s. instructions manual)
Dimensions:	Ø 75 x 26 mm (Ø x H)
Packaging unit:	10 pieces

### Technical symbols

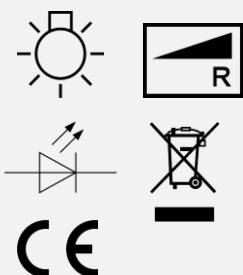

### Product illustration

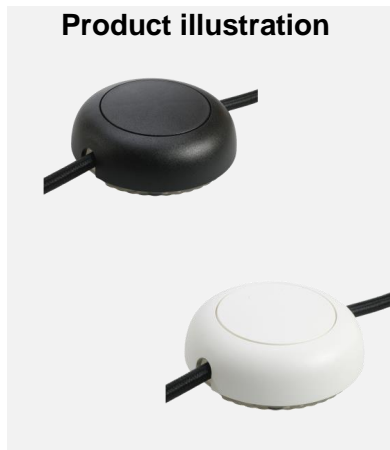

Govena Lighting S.A.

Ul. Sluzewska 8-15

87-100 Torun

Poland

VAT no.: PL 956-226-01-42

Phone no.: +48 56 619 66 73

Fax no.: +48 56 619 66 02

[www.govena.com](http://www.govena.com)